


N3F1C

SOFT-CLOSING CONCEALED FULL EXTENSION SLIDE (16MM BOARD THICKNESS WITH LOCKING DEVICE)
三节隐藏式缓冲滑轨 (16mm 板厚带分离器)



The image shows two views of the N3F1C slide: a top view and a side view. Below the side view, two locking devices are shown: a 2-direction locking device and a 6-direction locking device.

→ 隐藏式、全拉出、静音式

→ 载重: 35kg

→ 材料: 镀锌板

→ 材料厚度(上、中、下)轨: 1.0x1.5x1.8mm

→ 无需工具, 抽屉可快速安装与拆卸

→ 静音系统, 滑轨运动顺畅

→ 三维调节, 高度调节0~3mm, 左右调节±2mm, 前后调节0~4mm

→ 缓冲功能 平缓关闭

→ Concealed, full extension, quiet movement

→ Dynamic load capacity: 35kg

→ Material: galvanized steel



→ Material thickness: 1.0x1.5x1.8mm

→ Tool-free quick installation

→ Quiet system guarantees the slides run smoothly without noise

→ 6-way adjustment, 0~3mm highly, ±2mm left and right, 0~4mm before and after

→ Soft-closing function make the drawer close safely without effect of weight

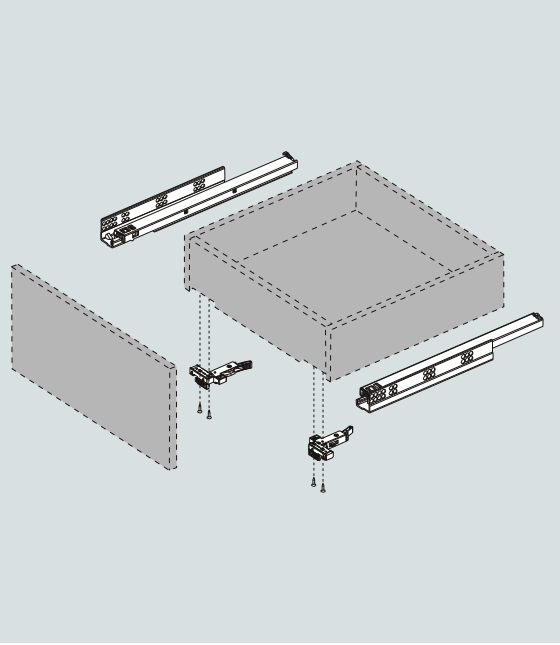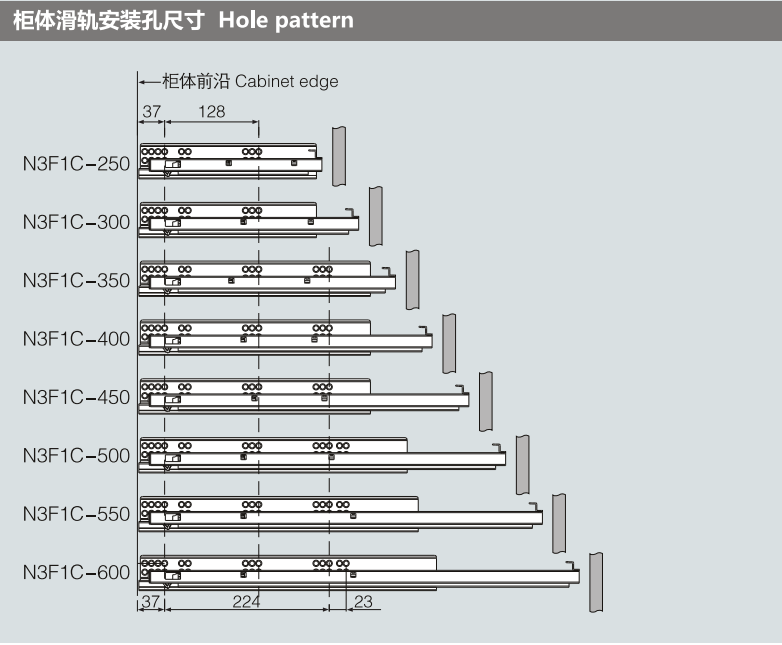

产品型号 Item No.	标称长度NL (mm) Nominal length	拉出长度 (mm) Travel length	最小柜深LT (mm) (外抽 / 内抽) Min cabinet depth (Standard / Inner)	包装(套/箱) Packing (Set/Box)
N3F1C-250	250	229	260 / 260+X	10
N3F1C-300	300	279	310 / 310+X	10
N3F1C-350	350	329	360 / 360+X	10
N3F1C-400	400	379	410 / 410+X	10
N3F1C-450	450	429	460 / 460+X	10
N3F1C-500	500	479	510 / 510+X	10
N3F1C-550	550	529	560 / 560+X	10
N3F1C-600	600	579	610 / 610+X	10

柜体所需空间 Space required

SKW: 抽屉净宽 Drawer width
LW: 柜体净宽 Inside net width
Max.: 最大尺寸

The diagram shows the space requirements for the slide. It includes dimensions for the drawer width (SKW), the cabinet width (LW), and the maximum width (Max.).

外置抽屉 Standard drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth

The diagram shows the dimensions for a standard drawer. It includes the nominal length (NL), the length of the drawer (SKL), and the minimum cabinet depth (LT).

内置抽屉 Inner drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth
X: 面板厚度 Thickness of the front panel

The diagram shows the dimensions for an inner drawer. It includes the nominal length (NL), the length of the drawer (SKL), the minimum cabinet depth (LT), and the thickness of the front panel (X).

抽屉后板开槽打孔尺寸 Hole size on rear panel of the drawer

NL: 标称长度 Nominal length
Min.: 最小尺寸

The diagram shows the hole size on the rear panel of the drawer. It includes the nominal length (NL) and the minimum size (Min.).

分离器安装 Installation of the locking device

The diagrams show the installation of the locking device. They include a 6-direction locking device and a 2-direction locking device, with dimensions for the hole size (70, 50).

可选配六方位调节分离器或二方位调节分离器
6 directions locking device or 2 directions locking device

装卸调试步骤说明 Installation instruction

滑轨安装 Installation of the slides

The diagram shows the installation of the slides into the cabinet drawer.

抽屉安装与调节
Installation of the drawer and adjustment

The diagram shows the installation of the drawer and the adjustment of the height. It includes a note that the drawer can be adjusted 2mm vertically through the plastic adjustable parts.

抽屉拆卸 Removal of the drawer

The diagram shows the removal of the drawer. It includes a note that the locking device should be pressed with the hands in the direction of the arrow to remove the drawer.